

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 293 792 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
19.03.2003 Bulletin 2003/12

(51) Int Cl.7: **G01R 33/06, G01C 17/00**

(21) Application number: **02020779.1**

(22) Date of filing: **16.09.2002**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
IE IT LI LU MC NL PT SE SK TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Kawase, Masahiro**  
**Chichibu-shi, Saitama (JP)**

(30) Priority: **17.09.2001 JP 2001280971**  
**28.08.2002 JP 2002248545**

(74) Representative: **Weser, Wolfgang, Dr. Dipl.-Phys.**  
**Weser & Kollegen,**  
**Patentanwälte,**  
**Radeckestrasse 43**  
**81245 München (DE)**


(71) Applicant: **CANON DENSHI KABUSHIKI KAISHA**  
**Chichibu-shi Saitama-ken (JP)**

(54) **Magnetic detection element utilizing magneto-impedance effect, production method of the element, and portable equipment using the element**

(57) A magnetic detection element of the present invention for detecting a strength of an external magnetic field, comprises a magnetic thin film formed on a single non-magnetic substrate, a circuit that applies a high-frequency current to the magnetic thin film, and a spiral

type planar coil that is stacked on the magnetic thin film through an insulating layer, wherein the magnetic thin film is formed in a longitudinal shape and magnetic anisotropy is given so that direction of easy magnetization axis is orthogonal to a longitudinal direction of the longitudinal shape.

**FIG. 1A**

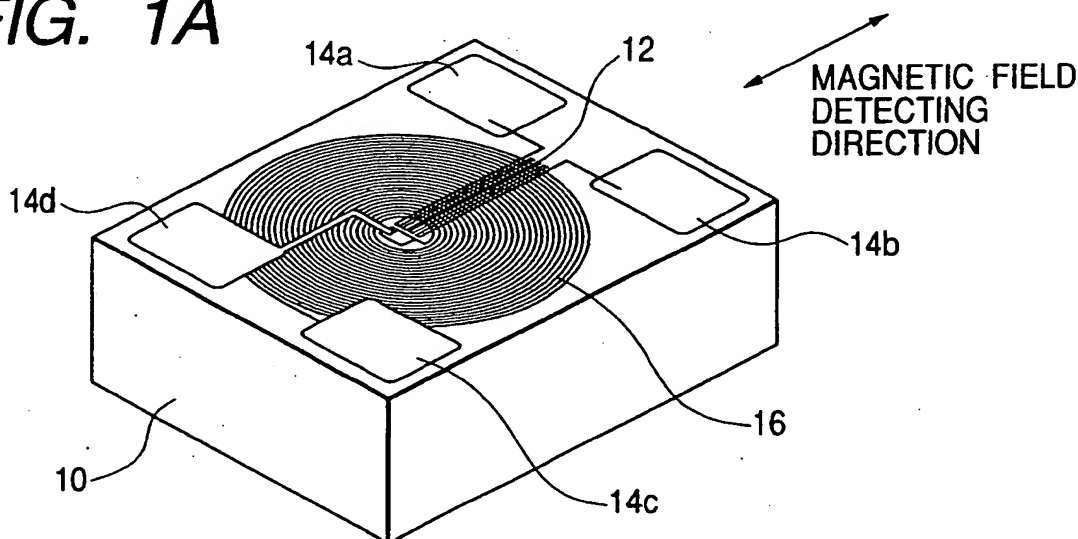

## Description

### BACKGROUND OF THE INVENTION

#### Field of the Invention

[0001] The present invention relates to a magnetic detection element that uses a magneto-impedance element comprising a magnetic body as a magnetic detection portion in which impedance between both ends of the magnetic body changes according to an external magnetic field when a high-frequency current is applied to the magnetic body, a production method thereof, and portable equipment equipped with the element.

#### Related Background Art

[0002] Recently, since small information terminal functions of mobile phones, PDA and the like have been developed, needs of displaying magnetic azimuth have increased in map information display, GPS mounting, etc.

[0003] However, since high-density mounting has been required for a parts environment in connection with the miniaturization of portable equipment, the demand for an occupation area and height has become severe. As an azimuth sensor, a fluxgate sensor and a magnetoresistive element (MR sensor) have already existed, but, since there are limits in their sizes, a magnetic field sensor in chip part size has been desired.

[0004] As described in Japanese Patent No.3096413, applications of an azimuth sensor made of a magnetic thin film have been already proposed. As shown in FIG. 14, an element comprising a parallel pattern 112 composed of a plurality of slender and straight lines which is formed with a magnetic thin film on a non-magnetic substrate 110 made of glass or the like has been already put to practical use, and hence, a small-sized element like a chip resistor have been realized. The sensing operation is performed by applying a high-frequency current to electrodes 114a and 114b that are both ends of the pattern 112, and the sensor is used by changing impedance of both the ends in a magnetic field detecting direction shown by an arrow in the figure.

[0005] The change of the impedance to the external magnetic field shows a V-characteristic as shown in FIG. 15, and an inclined portion of this V-characteristic is used for sensing operation. When a DC magnetic field is detected like an azimuth sensor, a coil 115 is wrapped as shown in FIG. 14 to apply an alternating current bias, operating points are set in the inclined portion of the V-characteristic in plus and minus sides of the magnetic field, and difference  $\Delta Z$  between impedances at both the operating points to the external magnetic field Hex is taken out as an electrical signal.

[0006] However, in the bias coil 115 externally mounted as shown in FIG. 14, it is not possible to effectively use the element size, and hence, it is not possible to

correspond to space-saving for portable equipment or the like.

[0007] Then, if the bias coil is constituted with a conductive thin film 116 as shown in FIG. 16 and it is possible to build the bias coil in the element, the demand can be satisfactorily achieved. Nevertheless, if this solenoid type bias coil is adopted like a sectional view in FIG. 17, it is necessary also to form a thin film coil layer 116a below the magnetic thin film 112. Hence, due to property degradation by stress warpage between materials through an insulating layer 118 and limitations of temperature conditions by the thermal resistance of the insulating layer 118, it becomes difficult to secure characteristics of the magnetic thin film.

[0008] Specifically, since the insulating film 118 and a coil conductive layer 116a are inserted between the magnetic thin film 112 and non-magnetic substrate 110 in FIG. 17, it is difficult to control the stress to the magnetic thin film and it is also difficult to obtain optimal conditions for magnetic characteristics. In addition, limitations such as impossibility of temperature increase to 500°C or higher arise in heat treatment for creating the anisotropy of the magnetic characteristics.

[0009] In addition, it is also possible to function the above-described coil as a detector coil that takes out a change in magnetic flux, which the magnetic thin film generates, as an induced voltage instead of the bias coil. Even in the case of such structure, there is a similar problem.

### SUMMARY OF THE INVENTION

[0010] An object of the present invention is to provide an element structure by which a device characteristic becomes stable and size is not sacrificed when a bias coil or a detecting coil is built in this chip size of magnetic detection element.

[0011] One of structures for achieving the above-mentioned object of the present invention is as follows.

[0012] A magnetic detection element for detecting the, strength of an external magnetic field comprises:

a magnetic thin film formed on a single non-magnetic substrate;

a circuit that applies a high-frequency current to the above-described magnetic thin film; and

a spiral planar coil that is stacked on the above-described magnetic thin film through an insulating layer,

wherein the above-described magnetic thin film is formed in a longitudinal shape and magnetic anisotropy is given so that direction of easy magnetization axis may become orthogonal to the longitudinal direction of the longitudinal shape.

[0013] In addition, one of the production methods for achieving the above-mentioned object is as follows.

[0014] A production method of a magnetic detection

element comprises:

a step of forming a magnetic thin film on a single non-magnetic substrate;  
 a step of giving a predetermined magnetic characteristic to the above-described magnetic thin film by performing heat treatment in a magnetic field after forming the above-described magnetic thin film;  
 a step of forming an insulating film on the above-described magnetic thin film; and  
 a step of forming a spiral coil pattern made of a conductive metal material on the above-described insulating film.

## BRIEF DESCRIPTION OF THE DRAWINGS

### [0015]

FIG. 1A is a perspective view showing an embodiment of a magnetic detection element of the present invention;

FIGS. 1B and 1C are diagrams showing circuits connected to each electrode of the magnetic detection element of the present invention;

FIG. 2 is a perspective sectional view of a spiral coil;

FIG. 3 is a graph showing the relationship between coil pitch and necessary coil current value;

FIG. 4A is a plan view showing a case of a coil having the same pitch;

FIG. 4B is a plan view showing a case of a coil having varied pitches;

FIGS. 5A, 5B, 5C, 5D and 5E are step views showing the production process of the magnetic detection element of FIG. 1A;

FIG. 6 is a graph showing the evaluation data of the magnetic detection element of FIG. 1A;

FIG. 7 is a diagram showing an evaluation circuit;

FIG. 8 is a perspective view showing another embodiment of the magnetic detection element of the present invention;

FIG. 9 is a diagram showing an operation circuit of the magnetic detection element in a second embodiment of the present invention;

FIG. 10 is a chart showing the correspondence of an output of a spiral coil to an applied voltage to a magnetic detection portion;

FIG. 11 is a graph showing a detection output in the circuit of FIG. 9;

FIG. 12 is a view showing a wristwatch in which the magnetic detection element of the present invention is built as an azimuth sensor;

FIG. 13 is a view showing a PDA in which the magnetic detection element of the present invention is built as an azimuth sensor;

FIG. 14 is a perspective view showing a conventional magnetic detection element;

FIG. 15 is a graph showing the characteristic of the element of FIG. 14;

FIG. 16 is a plan view showing another conventional magnetic detection element; and

FIG. 17 is a sectional view of the element of FIG. 16.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0016] Hereafter, embodiments of the present invention will be explained with referring to the attached drawings.

(Embodiment 1)

[0017] A first embodiment is shown in FIGS. 1A to 1C.

[0018] A magnetic detection portion 12 having the structure formed by folded magnetic thin film patterns, which are slender and are in parallel to each other, on a single non-magnetic substrate 10 made of a glass substrate etc. is constituted, and both ends of the magnetic detection portion 12 are connected to electrodes 14a and 14b. The magnetic field detecting direction of the magnetic detection portion is a longitudinal direction of the patterns like the direction shown by an arrow in the figure. In addition, the magnetic detection portion is given magnetic anisotropy so that direction of easy magnetization axis may become orthogonal to the longitudinal direction. On the magnetic detection portion 12, with sandwiching a first insulating layer, a flat spiral coil 16 is arranged so that its center may coincide with an end of the magnetic field detection portion 12. Both ends of the above-described coil are connected to electrodes 14c and 14d with sandwiching a second insulating layer. (Since being not easy to be understood, the illustration of the insulating layer will be explained in the following production method.) In this structure, a current is applied from a current-supply circuit, shown in FIGS. 1B and 1C, to the spiral coil 16 through the electrodes 14c and 14d, and a bias magnetic field is applied to the magnetic detection portion by using a magnetic field that is generated from a coil line crossing on the magnetic detection portion.

[0019] Specifically, this will be explained with using a perspective sectional view of FIG. 2.

[0020] When a current is flowed into the coil 16 in the direction shown by an arrow, a magnetic field is given to the magnetic field detection portion 12 in the right-to-left direction in the figure in each line owing to the corkscrew rule. Though magnetic flux in the magnetic field detection portion has magnetic flux distribution with a ripple  $\Delta\Phi$  more or less, a magnetic field is applied as a bias.

[0021] Since the strength of the magnetic field applied to the magnetic field detection portion 12 is inversely proportional to a line pitch  $p$  of the coil, the necessary coil current value has the characteristic as shown in FIG. 3. In the inclined portion of the V-characteristic explained in FIG. 15, if a lowest portion of the inclined part with good linearity is 20e. An applied magnetic field hav-

ing at least 20e is necessary, and the result of measuring the current value for obtaining 20e in the prototyping of the element where the line pitch of the coil was changed is the characteristic shown in FIG. 3. Since it was not possible to directly measure the magnetic field of 20e from the coil, a magnetic field was applied in the Helmholtz coil, and a voltage value at the application of 20e was obtained as the element characteristic. After that, a coil current that became the same as it was searched to determine the necessary current value.

[0022] As a result, in consideration of portable equipment, it is difficult to supply a current exceeding 20 mA, and for that, it is desirable to make the line pitch of the coil having 50  $\mu\text{m}$  or less. Actually, it is desirable to make the pitch of 25  $\mu\text{m}$  or less so that the current becomes 10 mA or less. In addition, in regard to narrowing the pitch, a pitch of 8  $\mu\text{m}$  or more consisting of linewidth of 5  $\mu\text{m}$  or more and a space of 3  $\mu\text{m}$  or more is desirable due to a problem of a supply voltage and heat generation by the increase of coil resistance, and the limitations on the production process of width  $w$  and height  $t$  of the coil line.

[0023] In addition, though bias magnetic field strength also depends on a gap  $d$  between the coil and the magnetic field detection portion, magnetic flux from the coil is absorbed by a magnetic body that is the magnetic field detection portion to form a magnetic circuit. Hence, the magnetic flux change in the magnetic body that is caused by the gap  $d$  is gentle. Specifically, the decrease of magnetic flux in the magnetic body in case of  $d = 10 \mu\text{m}$  is about 7% against in case of  $d = 1 \mu\text{m}$ , which is small. That is, it is not necessary to severely manage the gap  $d$ , i.e., the thickness of the insulating film between the coil and the magnetic field detection portion. This means it is convenient in production.

[0024] Since the spiral coil 16 in this embodiment contacts with the magnetic detection portion 12 in micron order, the overhead and vicinity of the magnetic field detection portion contribute to the application of the bias magnetic field. Then, if the size of necessary patterns is secured, other pattern portions can be freely set. As shown in FIG. 4B, by relatively narrowing other pattern pitches  $p_o$  against a pattern pitch  $p_i$  in the vicinity of the magnetic detection portion, it becomes possible to aim at further miniaturization of the element in comparison with the case of FIG. 4A where the pitches are the same.

[0025] In addition, if the electrodes 14 are arranged more internally so that the electrodes 14 may overlap the coil 16, it is possible to lessen the size of the element. In addition, it is convenient in high density substrate mounting that all electrodes of the element are formed on one plane and that the electrodes on the formation plane and an electrode portion of a mate substrate are two-dimensionally jointed by solder joint.

[0026] The detection of an external magnetic field by using the magnetic detection element having the above-mentioned structure is performed by detecting the amplitude and direction of the external magnetic field by

applying a current from the current-supply circuit (refer to FIGS. 1B and 1C) for bias magnetic field generation to the spiral coil 16 through the electrodes 14c and 14d, applying a high-frequency current from other current-supply circuits (refer to FIGS. 1B and 1C) to the magnetic detection portion 12 through the electrodes 14a and 14b with applying the bias magnetic field to the magnetic detection portion 12, and changing impedance in the magnetic field detecting direction shown by an arrow in FIG. 1A.

[0027] Next, a production method of the magnetic detection element according to the embodiment in FIGS. 1A to 1C will be explained with referring to FIGS. 5A to 5E.

[0028] A Ni-Fe metal magnetic film, and a high permeability magnetic thin film 12 such as a Co-Zr-Nb-based amorphous film, and a Fe-Ta-C- or Fe-Ta-N-based microcrystallite film are deposited on the single non-magnetic substrate 10, consisting of glass, ceramic, or the like, by sputtering or plating. In order to effectively function a skin effect thereof, in consideration of a frequency of a current applied to the element, the film thickness is selected from among 1 to 5  $\mu\text{m}$ . Then, the fanfold pattern 12 consisting of patterns that are slender and in parallel to each other is formed by dry or wet etching. As for the characteristic of the element, an axis of facilitating magnetization is given in the direction, shown by the arrow, by performing heat treatment etc. in the magnetic field at a stage after the magnetic film deposition or after pattern etching. This is because thermal limitation is given in the insulating film etc. in the post-processing of coil formation. This state is shown in FIG. 5A.

[0029] Next, though a first insulating layer 20 is formed ahead of the coil formation, the thickness  $d$  of this layer particularly has no dimensional limitation, but it is made about 1 to 20  $\mu\text{m}$ . As the insulating film, a non-magnetic oxide film made of  $\text{SiO}_2$ ,  $\text{Cr}_2\text{O}_3$ , or the like, a heat-resistant resin film such as of polyimide, or the like are formed. The structure of this first insulating film corresponds to that in FIG. 5B.

[0030] Next, the coil 16 is produced by forming a several-microns-thick conducting layer made of copper, aluminum, gold, or the like on the entire first insulating film 20 by sputtering or plating, and forming the coil 16 by dry or wet etching so that a center of the spiral coil 16 may come to an end of the magnetic detection portion 12. As another method, it is possible to adopt a method of forming a coil pattern in the resist film as a groove, and forming the coil by plating of a seed electrode made of gold, or the like that is put on the bottom. The structure of this coil layer corresponds to that in FIG. 5C.

[0031] Moreover, a second insulating film 22 is formed in the same manner as in the case of the first insulating film. However, window portions for connecting both ends of the spiral coil to the electrodes are provided (refer to FIG. 5D).

[0032] Finally, by forming the electrodes 14 connect-

ed to both ends of the magnetic detection portion 12 and spiral coil 16 (refer to FIG. 5E), the element in which the bias coil is built is completed.

[0033] FIG. 6 shows the examination data of the sensor element with this structure.

[0034] The element having the axis of facilitating magnetization in a plane orthogonal to the magnetic field detecting direction in the magnetic film of the magnetic field detection portion shows the V-shaped external magnetic field detection characteristic as shown in FIG. 6. The element was prototyped with a Fe-Ta-C-based soft magnetic thin film in the dimensions of 24- $\mu$ m of pattern width, 1.5-mm of pattern length, 2- $\mu$ m of film thickness, and 8 lines. A maximum output of 270 mV was obtained in an evaluation circuit consisting of a 5V, 20MHz oscillation circuit 17 and a detector circuit 18 as shown in FIG. 7.

[0035] The spiral coil 16 was formed in the dimensions of 18- $\mu$ m of copper pattern width of the coil, 24- $\mu$ m of pitch, and 60T of crossline number on the magnetic detection portion, and the first and second insulating films were formed as 3  $\mu$ m-thick film, respectively.

[0036] It was confirmed that, when a 15-mA bias current was applied, a characteristic curve shifted by 30e as shown by a broken line in comparison with the characteristic curve shown by a solid line in FIG. 6 in the case without the bias current, and hence, it was possible to use a portion where a sensibility inclination was large.

[0037] In addition, it is possible to obtain the effects of the present invention as shown in FIG. 8, even when a magnetic detection element is formed by forming a coil portion 26 with two centers of spirals by connecting spiral coils, and stacking the coil portion 26 so that its center portions may coincide with both ends of the magnetic detection portion, respectively.

(Embodiment 2)

[0038] In the above-mentioned first embodiment, the structure of detecting the amplitude and direction of an external magnetic field by applying a high-frequency current to a magnetic body, and detecting an impedance change between both ends thereof is shown. However, it is also good to make the structure of detecting the amplitude and direction of an external magnetic field by applying a high-frequency current to a magnetic body, and detecting an induced voltage change generated in a spiral coil according to the external magnetic field. In this case, the spiral coil is not used for bias magnetic field application, but for induced voltage detection.

[0039] Its specific structure will be explained by using FIG. 9.

[0040] Similarly to the conventional, a pulse-oscillated current is applied to the electrodes 14a and 14b of the magnetic detection portion 12 of the element by an oscillation circuit 217. As a waveform is shown in FIG. 10, a pulse voltage output with peaks corresponding to the rise and fall of the pulsed current flowed into the

magnetic detection portion 12 appears at both ends of the spiral coil. Since this peak height Vs changes almost proportionally to the external magnetic field, this peak value is taken out by a detection circuit 218. It is also good to output a voltage by processing peaks in a minus side or both sides besides peaks in a plus side. The characteristic at the time when the peak values in the plus side are detected is an S-shaped curve characteristic as shown in FIG. 11. Since the magnetic detection portion 12 and spiral coil 16 adjoin in the gap of several microns with sandwiching the insulating film, it is possible to efficiently take out the magnetic flux change in the magnetic thin film to the external magnetic field to obtain a high induced voltage.

(Embodiment 3)

[0041] Next, an embodiment of portable equipment where the magnetic detection element is built, as explained in the above-mentioned embodiment, will be explained. When two magnetic detection elements are used and arranged so that respective magnetic field detecting directions may be orthogonal, it is possible to take out signals corresponding to respective external magnetic fields in two orthogonal directions from respective magnetic field detecting elements. Using this, it is possible to constitute a magnetic sensor device that detects external magnetic fields in two directions, for example, an azimuth sensor that detects components of the magnetic fields in terrestrial magnetism in the X and Y directions orthogonal to each other, and detects an azimuth angle based on the direction of the terrestrial magnetic vector (N 'and S directions that a magnetic needle of a compass indicates).

[0042] In this embodiment, examples of combining two magnetic detection elements of the present invention and building them in a wristwatch and a PDA as azimuth sensors will be shown. In this embodiment, the two magnetic detection elements are mounted on a circuit board of the watch so that their longitudinal directions may be orthogonal. In FIG. 12, reference numeral 31 denotes a CPU that controls watch functions and an azimuth sensor, and this CPU performs arithmetic processing of the azimuth angle on the basis of the output from each of the magnetic detection elements. On a watch circuit board 32, two magnetic detection elements are mounted, and various circuits necessary for watch functions such as CPU 31 are formed besides an azimuth sensor drive circuit 35. Reference numeral 33 denotes various operating buttons concerning the watch function, 34 does a display part that displays time and azimuth. In this embodiment, it is possible to freely set inclination angles of the orthogonal axes (X and Y directions) of two magnetic detection elements, and a reference in the azimuth is finally defined on software.

[0043] In addition, as another specific example, an example of building the magnetic detection element of the present invention in a PDA as an azimuth sensor unit is

shown in FIG. 13. In this embodiment, the azimuth sensor unit is mounted on a main circuit board of the PDA. In FIG. 13, a CPU 41 takes charge of various functions of the PDA, and further controls the azimuth sensor unit also to execute the arithmetic processing of an azimuth angle. On a PDA main circuit board 42, an azimuth sensor unit is mounted, and various circuits necessary for PDA functions such as CPU 41 are formed besides an azimuth sensor drive circuit 45. Reference numeral 43 denotes various operating buttons, and 44 does a display part. Reference numeral 47 denotes a speaker. Reference numeral 48 denotes an about 32MB memory connected to the CPU 41. In this embodiment, it is possible to freely set inclination angles of the orthogonal axes (X and Y directions) of two magnetic detection elements, and a reference in the azimuth is finally defined on software. In this embodiment, it is possible to detect a current position with a GPS sensor not shown in the drawings, or azimuth with the azimuth detection portion 46, to retrieve map information stored in memory 48 on the basis of the detection result, and to display the current position and azimuth on a map with displaying the map information in the vicinity of the current position.

[0044] As explained above, according to the present invention, in respect of a highly sensitive thin film magneto-impedance element, it becomes possible to provide a small element whose performance is stable and in which a bias coil or a detection coil is built. In addition, since there are also sufficient numbers of degrees of freedom of electrodes and a coil pattern, it is also possible to design a smaller element. In addition, also in regard to a production method of the element, since a coil is stacked and formed thereabove after securing characteristics of the element, the production method is simple, and has a feature of being able to obtain stable performance. Furthermore, since the coil can be closely arranged to a magnetic detection portion in several-micron order, it is possible to efficiently apply a bias magnetic field or detect an induced voltage.

#### Claims

1. A magnetic detection element for detecting a strength of an external magnetic field, comprising:

a magnetic thin film formed on a single non-magnetic substrate;  
 a circuit that applies a high-frequency current to the magnetic thin film; and  
 a spiral type planar coil that is stacked on the magnetic thin film through an insulating layer, wherein the magnetic thin film is formed in a longitudinal shape and magnetic anisotropy is given so that direction of easy magnetization axis is orthogonal to a longitudinal direction of the longitudinal shape.

2. The element according to claim 1, further comprising:

a circuit that supplies a current to the planar coil so as to apply a bias magnetic field to the magnetic thin film; and

a circuit that detects change in impedance of the magnetic thin film.

3. The element according to claim 2, wherein the magnetic thin film is arranged between a center and an end of the planar coil so that a magnetic-field component in the same direction among magnetic fields where respective lines of the planar coil generate is applied.

4. The element according to claim 2, wherein a line pitch of the planar coil in a portion crossing the magnetic thin film is larger than a line pitch of another portion.

5. The element according to claim 2, wherein a line pitch S of the planar coil in a portion crossing the magnetic thin film is  $8 \mu\text{m} \leq S \leq 50 \mu\text{m}$ .

6. The element according to claim 2, wherein a line pitch S of the planar coil in a portion crossing the magnetic thin film is  $8 \mu\text{m} \leq S \leq 25 \mu\text{m}$ .

7. The element according to claim 1, wherein the planar coil comprises two coils that are arranged so that respective spiral centers of the coils are located in both ends of the magnetic thin film, and wherein the coils are mutually connected.

8. The element according to claim 1, wherein a leading electrode is formed so as to overlay on the planar coil through an insulating layer.

9. The element according to claim 1, further comprising:

a circuit that detects a change of an induced voltage generated by the planar coil.

10. Portable equipment comprising an azimuth sensor formed by arranging magnetic detection elements according to claim 1 so as to be mutually orthogonal.

11. A production method of a magnetic detection element, comprising:

a step of forming a magnetic thin film on a single non-magnetic substrate;

a step of giving a predetermined magnetic characteristic to the magnetic thin film by performing heat treatment in a magnetic field after

forming the magnetic thin film;  
a step of forming an insulating film on the magnetic thin film; and  
a step of forming a spiral coil pattern made of conductive metal material on the insulating film. 5

12. The method according to claim 11, wherein the spiral coil pattern is formed by etching the conductive metal material after depositing the conductive metal material. 10

13. The method according to claim 11, wherein the spiral coil pattern is formed by plating.

14. The method according to claim 11, further comprising a step of forming another insulating film on the spiral coil pattern and forming a leading electrode so as to overlay on the spiral coil pattern on the insulating film. 15

20

25

30

35

40

45

50

55

FIG. 1A

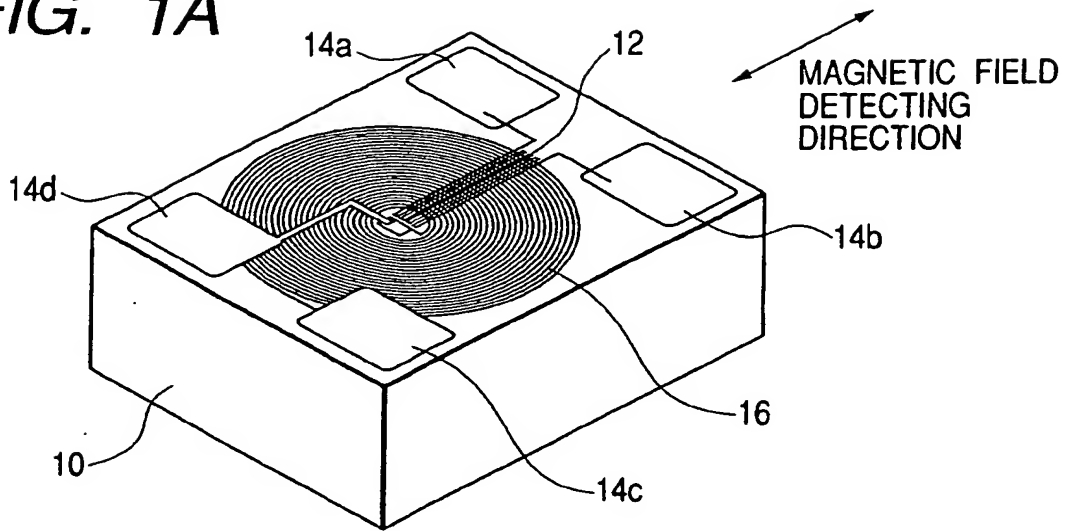


FIG. 1B

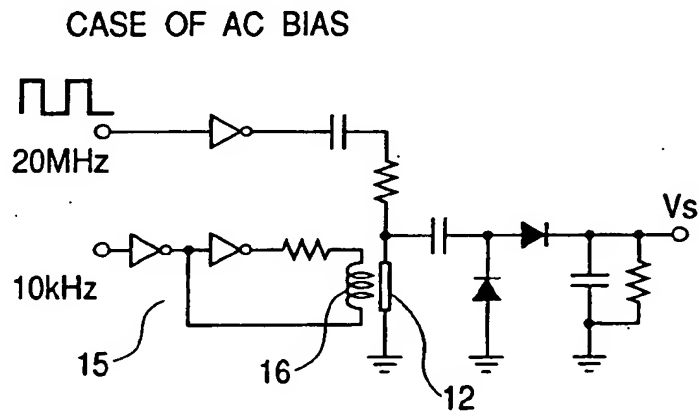


FIG. 1C

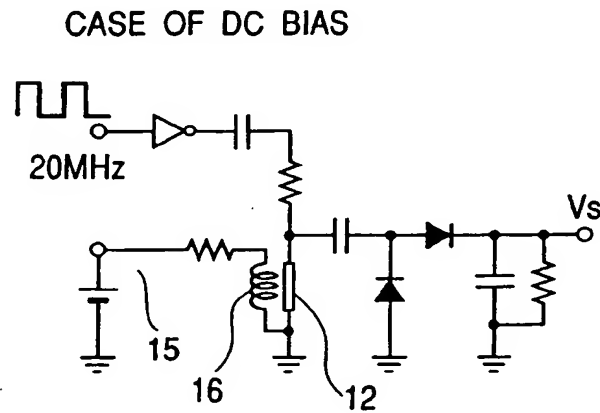




FIG. 2

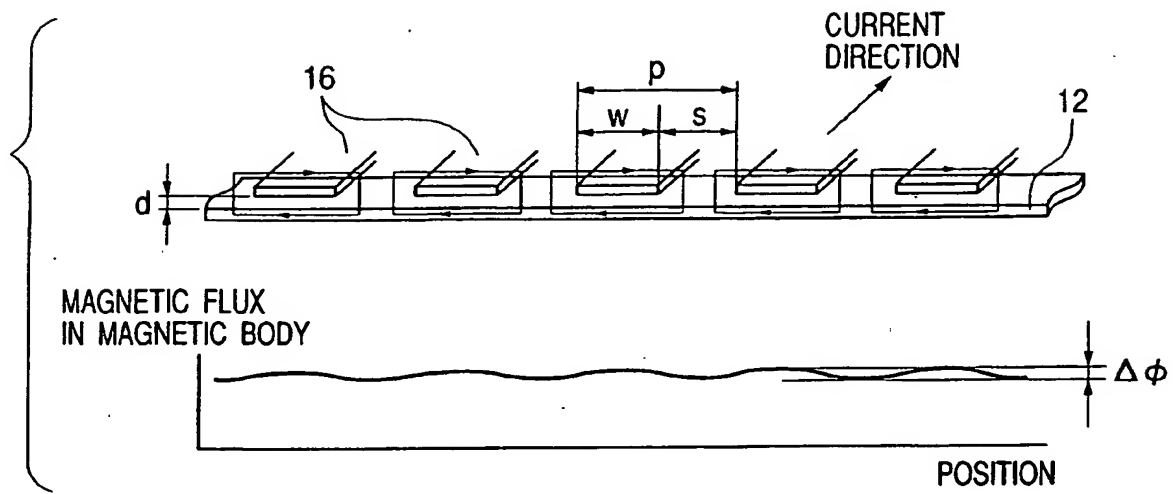


FIG. 3

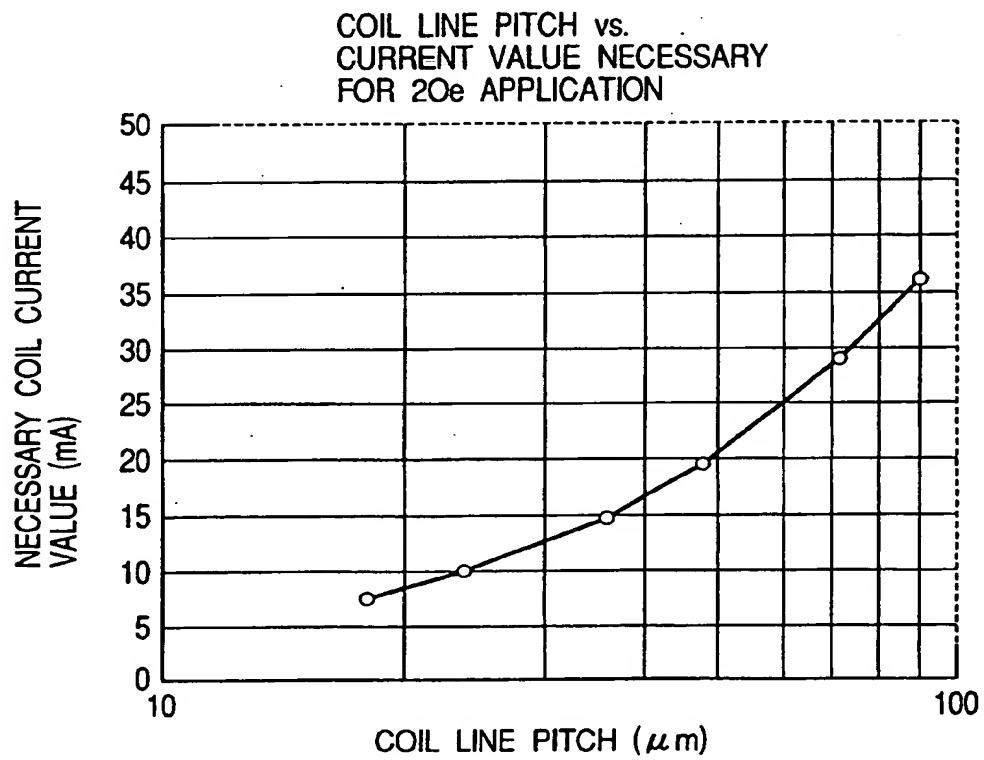


FIG. 4A

CASE OF COIL HAVING  
SAME PITCH

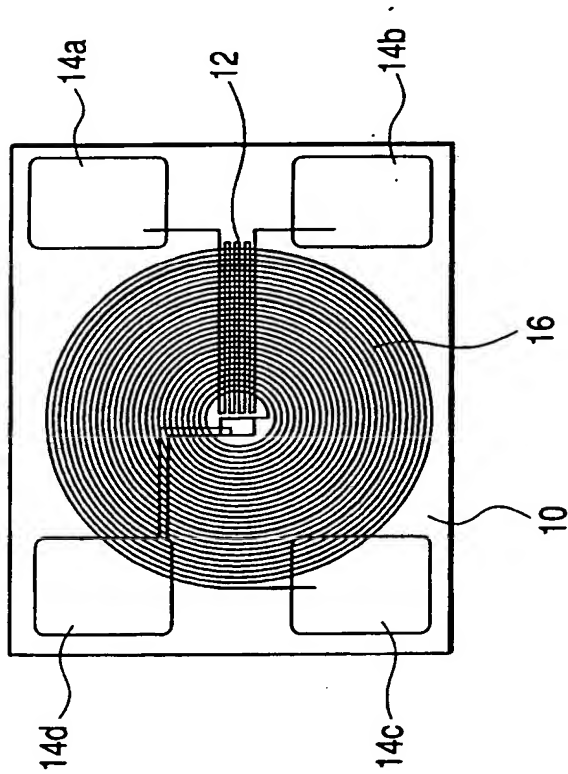
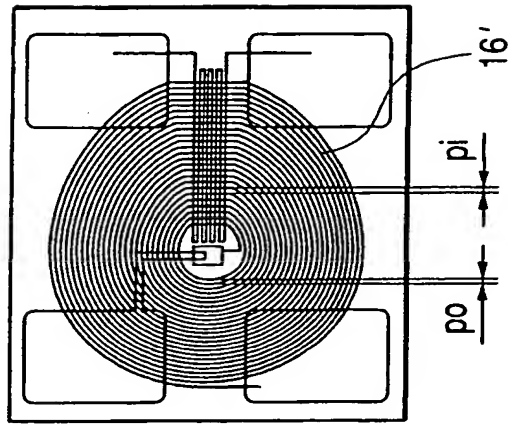


FIG. 4B

CASE OF COIL HAVING  
VARIED PITCH



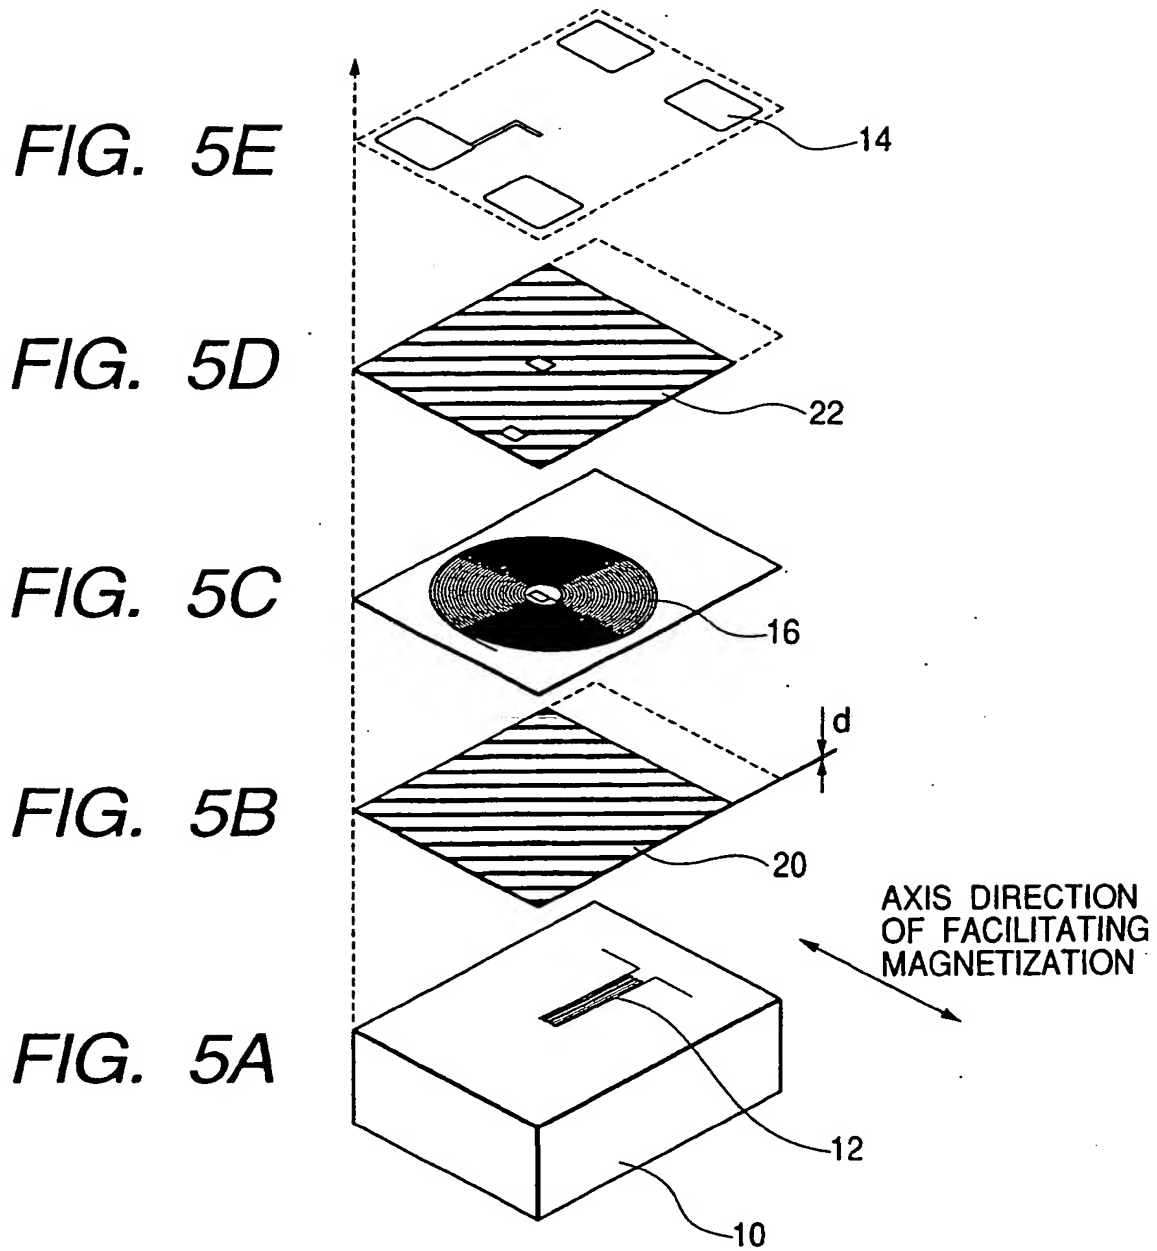


FIG. 6

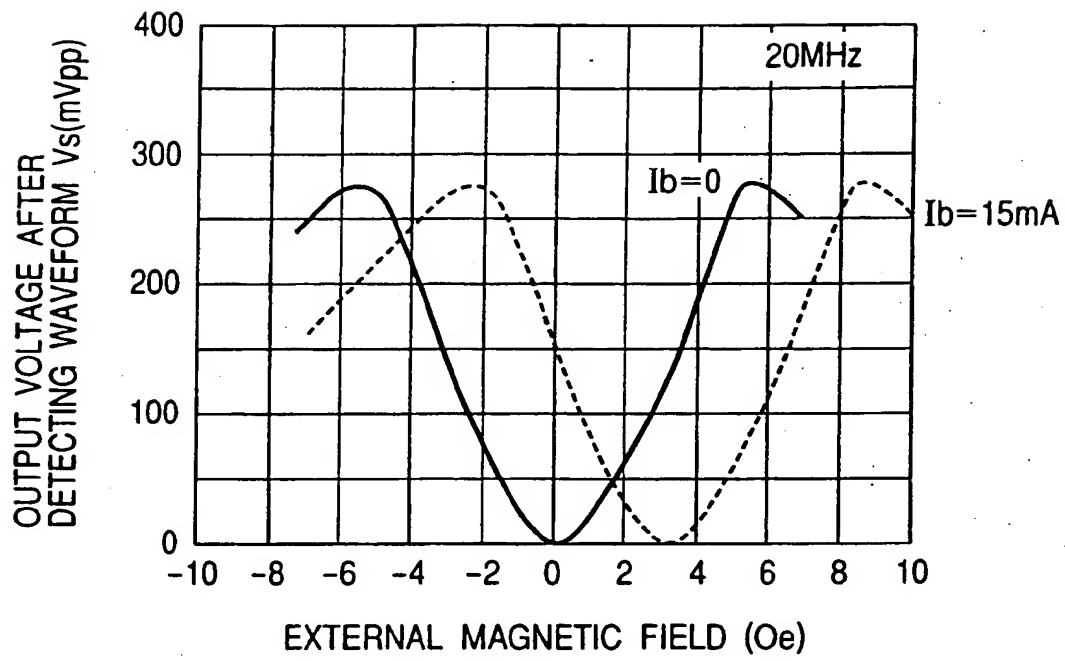
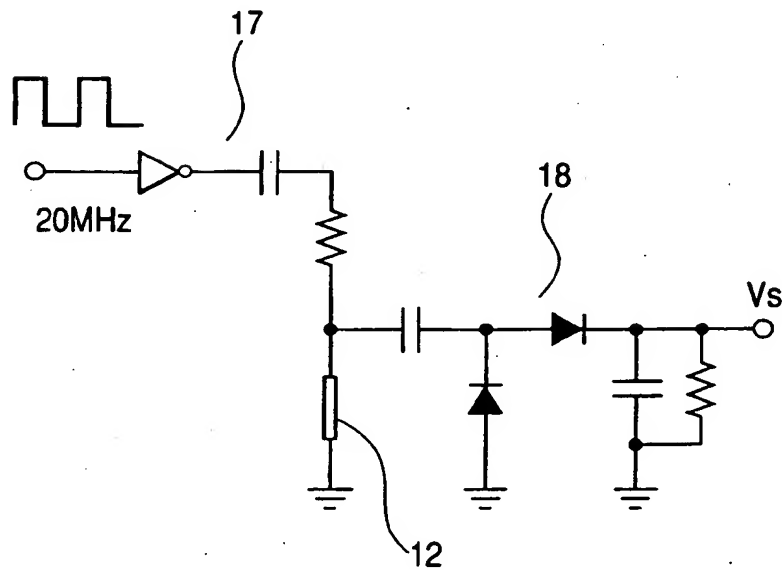
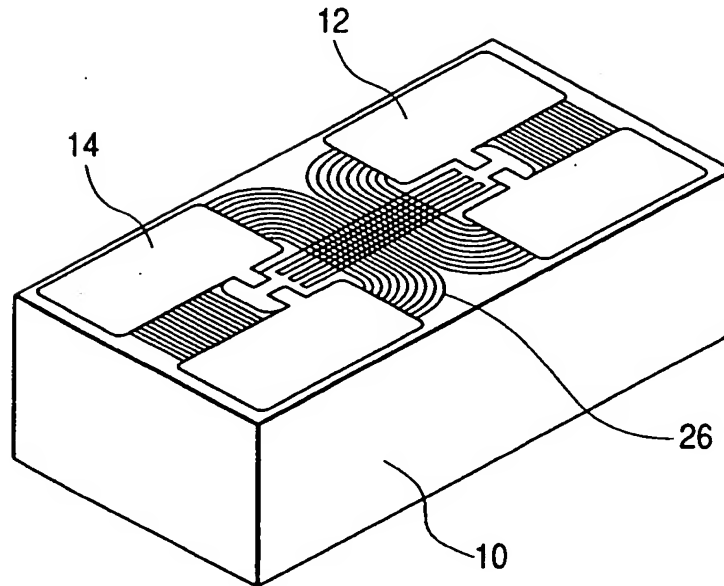


FIG. 7



**FIG. 8**



**FIG. 9**

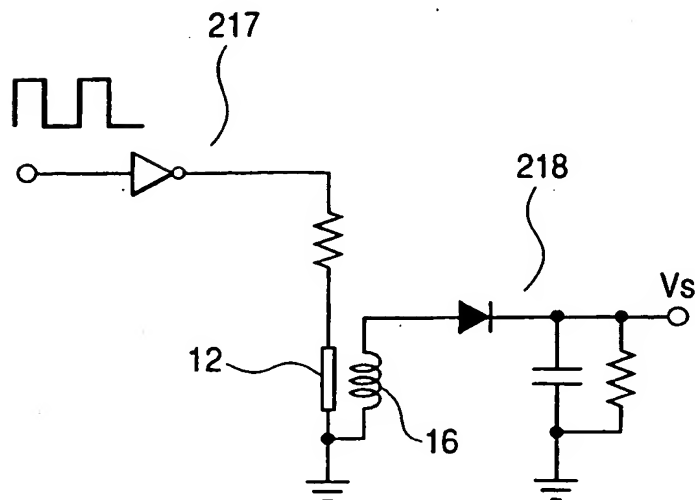


FIG. 10

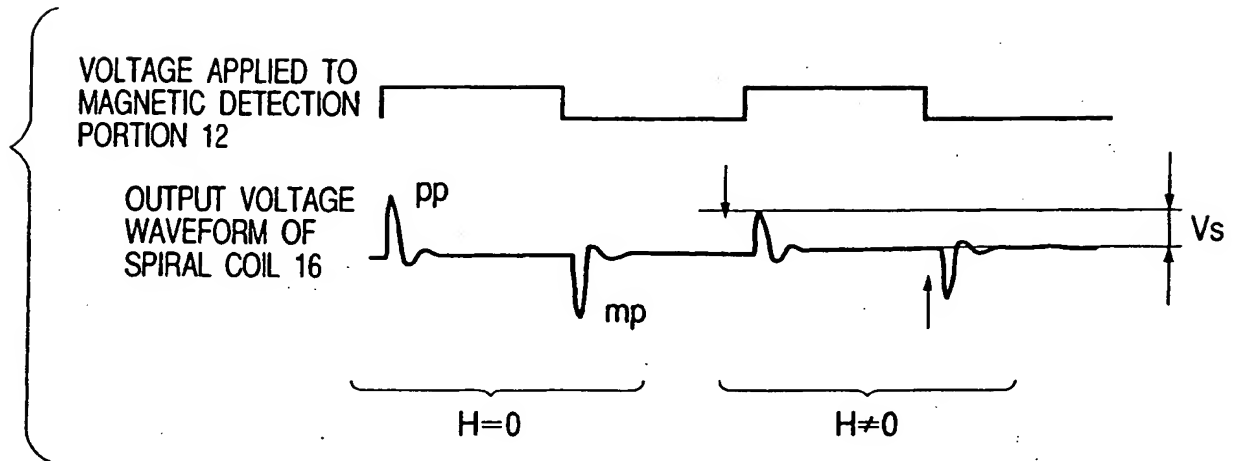


FIG. 11

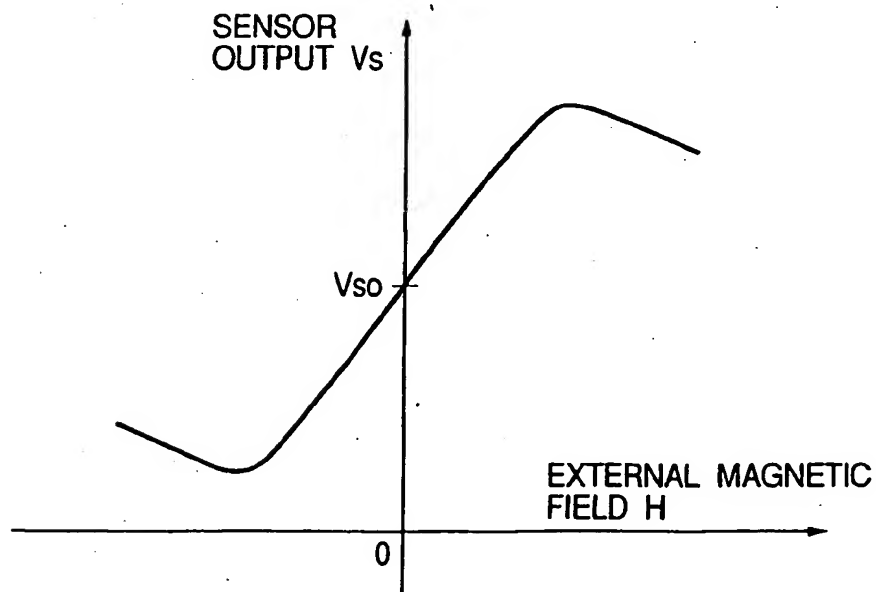


FIG. 12

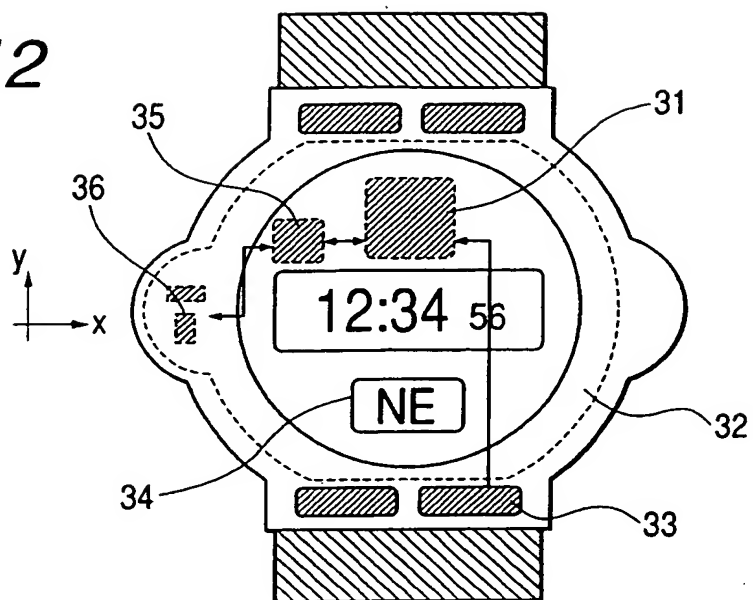


FIG. 13

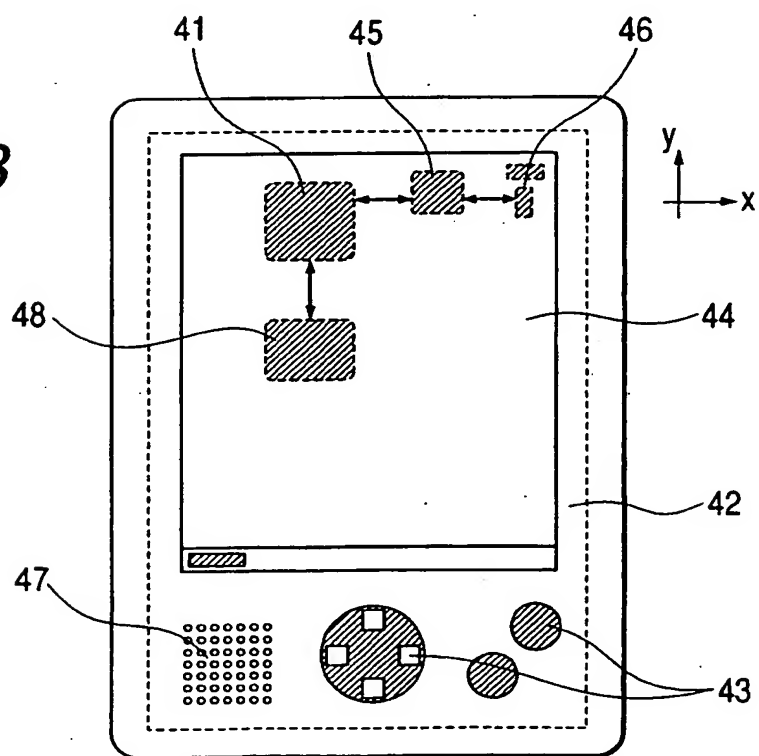


FIG. 14

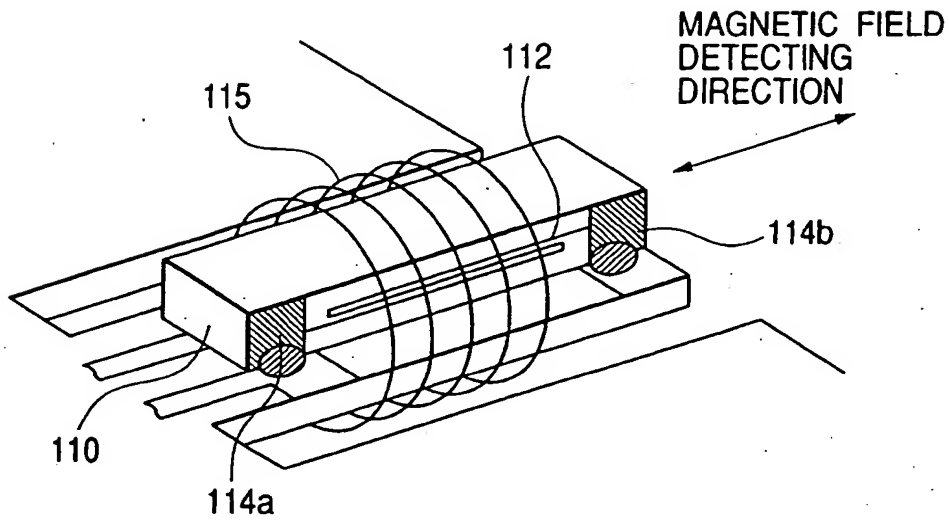
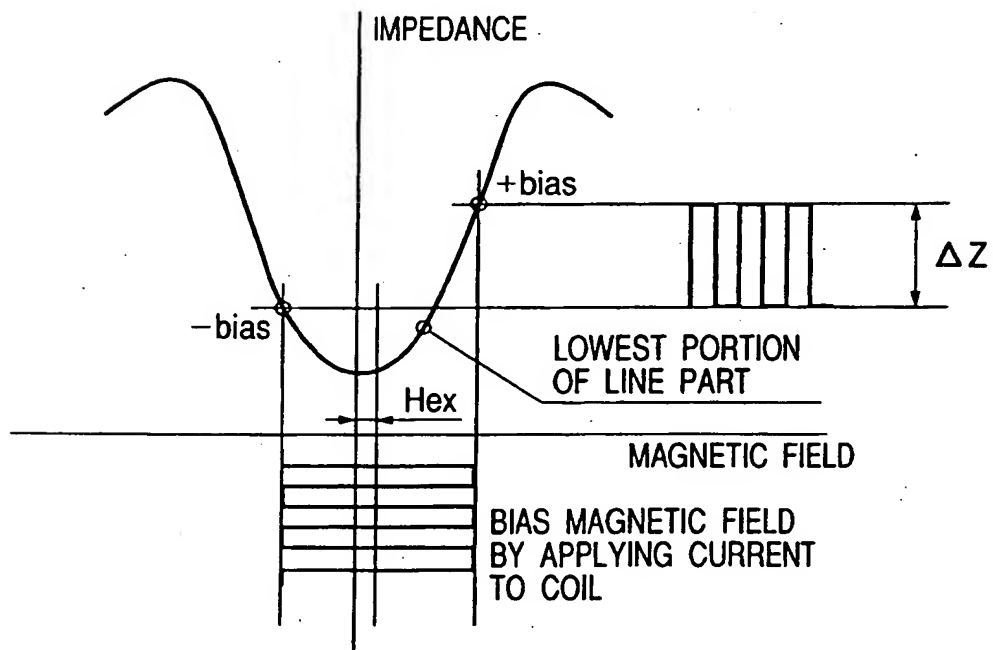
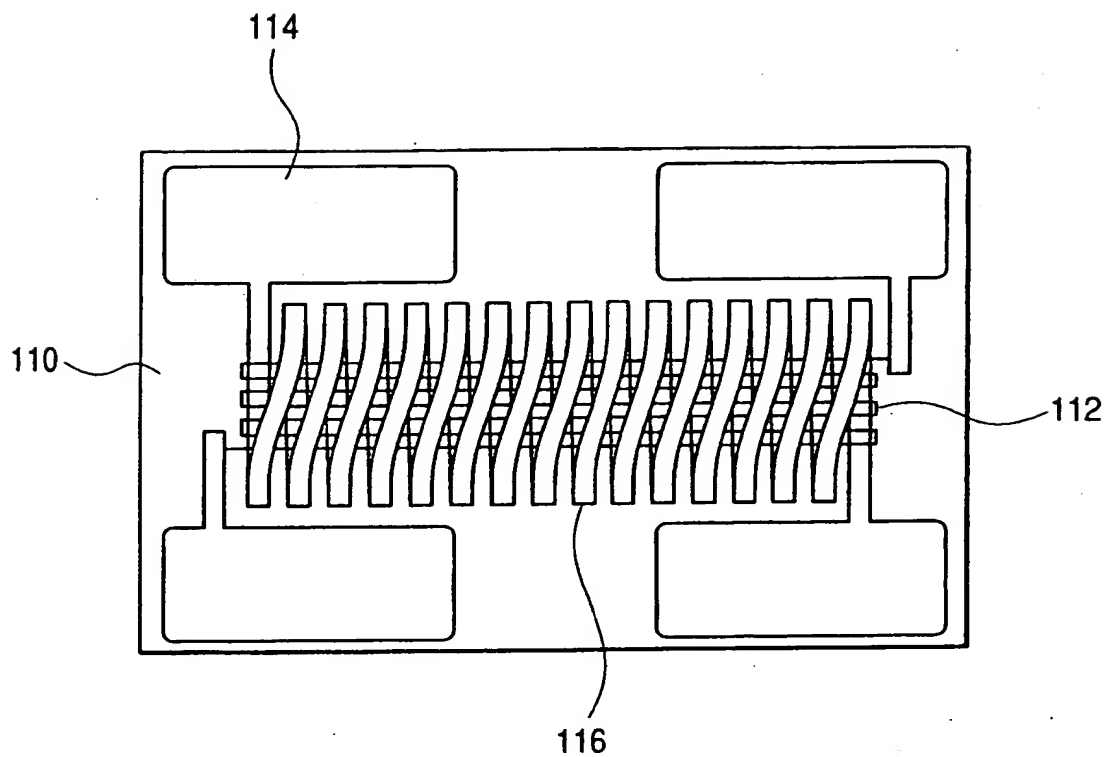


FIG. 15





**FIG. 16**



**FIG. 17**

